


Molded Case Circuit Breakers
G-TWIN series
 Type number nomenclature

1) BW 100 EA 6 - 3P 075
 (EA103B075)

2) BW 400 EA 6 - 3P 100

■ Type number nomenclature

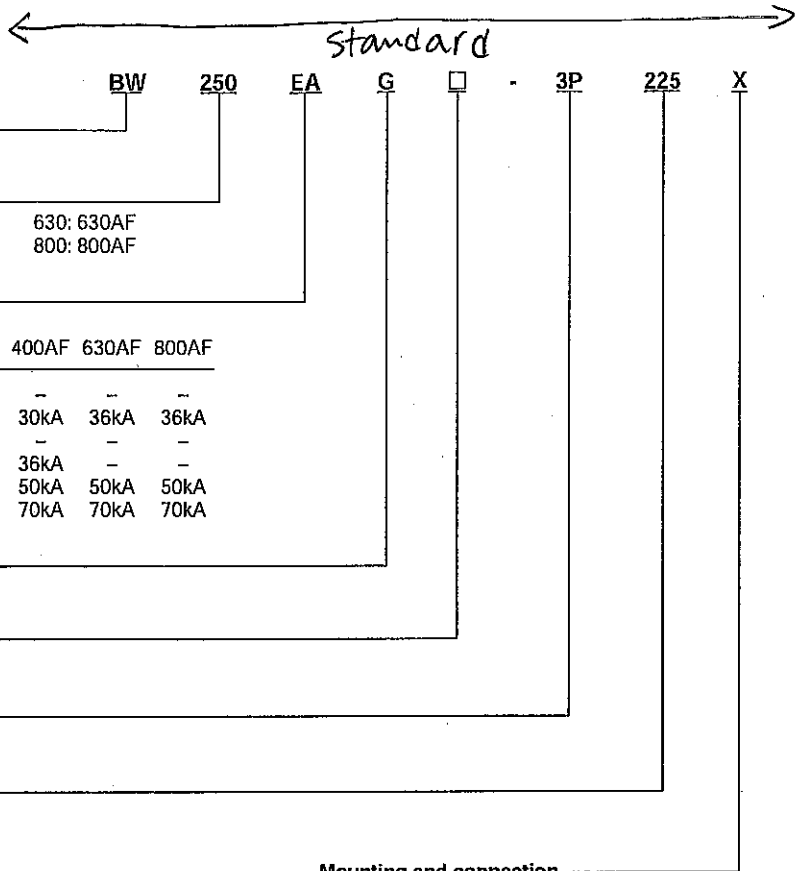

Series
 BW: G-TWIN series MCCB

Frame size
 32: 32AF 63: 63AF 125: 125AF 250: 250AF 630: 630AF
 50: 50AF 100: 100AF 160: 160AF 400: 400AF 800: 800AF

Breaking capacity

	Rated breaking capacity Icu (440V AC)									
	32AF	50AF	63AF	100AF	125AF	160AF	250AF	400AF	630AF	800AF
AA	1.5kA	1.5kA	-	1.5kA	-	-	-	-	-	-
EA	1.5kA	2.5kA	2.5kA	10kA	-	18kA	18kA	30kA	36kA	36kA
JA	-	-	-	-	30kA	30kA	30kA	-	-	-
SA	2.5kA	7.5kA	7.5kA	-	36kA	36kA	36kA	36kA	-	-
RA	-	10kA	10kA	-	50kA	50kA	50kA	50kA	50kA	50kA
HA	-	65kA	-	-	65kA	-	65kA	70kA	70kA	70kA

Model
 G: Line protection M: Motor protection

G-TWIN series
 Blank: Standard U: Global

No. of poles
 2P: 2-pole 3P: 3-pole 4P: 4-pole

Rated current
 See page 06/29.

Terminal combination (Global type)

Code	Terminal position		Applicable breaker type		
	Line	Load	BW50	BW100, 125, 250	BW400, 630, 800
Blank	Screw	Screw	●	●	-
Blank	Flat terminal	Flat terminal	-	-	●
SB	Block terminal	Block terminal	-	●	●
SF	Flat terminal	Flat terminal	●	●	-
S3	Screw	Flat terminal	●	●	-
S4	Flat terminal	Screw	●	●	-
S5	Screw	Block terminal	-	●	-
S6	Block terminal	Screw	-	●	-
S7	Flat terminal	Block terminal	-	●	●
S8	Block terminal	Flat terminal	-	●	●

Mounting and connection

• **Standard type**


- Blank: Front mounting front connection
- X: Front mounting rear connection
- E: Flush mounting rear connection
- Y: Flush mounting, top & bottom connection
- P: Plug-in mounting

option

Molded Case Circuit Breakers
G-TWIN series
 Type number nomenclature

2)

F1 AC200-240 V A

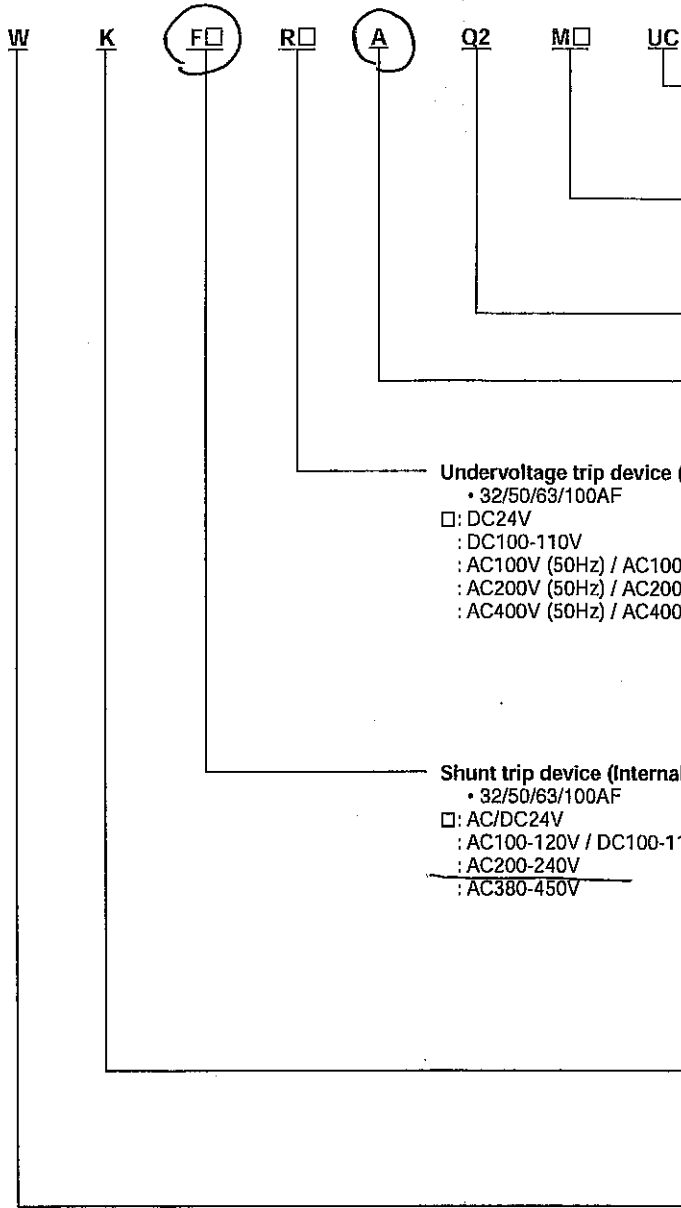

- Enclosure**
 UC: Standard
 UV: Dust-proof (IP40)
 UW: Rain-proof (IP54)
- With motor operating device (32 - 100AF)**
 □: DC100V
 AC100-110V
 AC200-220V
- Pad locking device**
 Q2: Plate type
- Connection method (internal accessories)**
 Blank: Lead-wire system
 A: Terminal block system
- Undervoltage trip device (External)***
 • 32/50/63/100AF
 □: DC24V
 : DC100-110V
 : AC100V (50Hz) / AC100-110V (60Hz)
 : AC200V (50Hz) / AC200-220V (60Hz)
 : AC400V (50Hz) / AC400-440V (60Hz)
- Undervoltage trip device (Internal)***
 • 125/160/250AF • 400/630/800AF
 □: DC24V AC/DC24V
 : DC48V AC/DC48V
 : DC100-110V AC/DC100-110V
 : DC125V AC120-130V / DC125V
 : AC100-110V AC200-240V / DC200-220V
 : AC110-130V AC277V
 : AC200-240V AC380-480V
 : AC277V
 : AC380-415V
 : AC440-480V
- Shunt trip device (Internal)***
 • 32/50/63/100AF
 □: AC/DC24V
 : AC100-120V / DC100-110V
 : AC200-240V
 : AC380-450V
- Shunt trip device (Internal)***
 • 125/160/250AF • 400/630/800AF
 □: AC/DC24V AC/DC24-48V
 : AC/DC48V AC100-240V / DC100-220V
 : AC100-120V / DC100-110V AC277V
 : AC120-130V AC380-550V
 : AC200-240V / DC200-220V
 : AC277V
 : AC380-440V
 : AC440-480V
 : AC500-550V
- Alarm switch***
 K: Standard SPDT
 J: Standard 2PDT
 8: For low level circuit SPDT
 9: For low level circuit 2PDT
- Auxiliary switch***
 W: Standard SPDT
 V: Standard 2PDT
 1: For low level circuit SPDT
 2: For low level circuit 2PDT

06

* For the available configuration of accessory, see page 06/68.

Molded Case Circuit Breakers
G-TWIN series
 Quick reference guide



■ **G-TWIN Standard Series**

Ampere frame		100A					
Type		BW100AAG		BW100EAG			
Pole		2	3	2	3		
Rated current Reference amb. temp. (40°C)		In(A)		50, 60, 63, 75, 100			
Rated impulse withstand voltage		Uimp(kV)		6			
Isolation compliant		●		●			
Rated insulation voltage Ui (V)		AC		500			
		DC		-			
Rated breaking capacity Icu/Ics (kA)	IEC 60947-2 EN 60947-2 JIS C 8201-2-1	AC	500V	-	7.5/4		
			440V	-	10/5		
			415V	-	10/5		
			400V	1.5/1	10/5		
			380V	1.5/1	10/5		
			240V	5/3	25/13		
			230V	5/3	25/13		
			DC	250V	-	5/3*1	
			GB14048.2	AC	400V	1.5/1	10/5
				230V	5/3	25/13	
Conforming to standards	CE Marking	● (TÜV)		● (TÜV)			
	CCC certificate	●		●			
	Electrical Appliance and Material Safety Law <PS>E ²	●		●			
Dimensions (mm)		a	50	75	50	75	
		b	100		100		
		c	60		60		
		d	84		84		
		Mass (kg)	0.4	0.5	0.4	0.5	
Tripping device		Thermal -magnetic					
Front mounting, front connection	No-mark	○	○	○	○		
Front mounting, rear connection	X	○	○	○	○		
Flush mounting, front connection	E	○	○	○	○		
Flush mounting, top & bottom connection	Y	○	○	○	○		
Plug-in mounting	P	○	○	○	○		
IEC 35mm wide rail mounting	No-mark	○	○	○	○		
Internal accessories Page 06/63							
Alarm switch	K	○	○	○	○		
Auxiliary switch	W	○	○	○	○		
Undervoltage trip	R	○	○	○	○		
Shunt trip	F	○	○	○	○		
External accessories Page 06/66							
Handle padlocking device Cap type	QN	○	○	○	○		
Handle padlocking device Plate type	Q2	▲	▲	▲	▲		
Operating handle N-type	N	○	○	○	○		
Operating handle V-type	V	○	○	○	○		
Terminal cover Short	BTLS	○	○	○	○		
Terminal cover Long	BTLL	○	○	○	○		
Insulation barrier Interphase	BP	○	○	○	○		
Insulation barrier Earth	BL	○	○	○	○		
Handle locking cover	L1	○	○	○	○		
Flat terminal	SS	○	○	○	○		
Block terminal	SL	-	-	-	-		

●: Approved ○: Available -: Not available ▲: Factory-mounted accessory
 Note: *1 Specify DC only when ordering circuit breakers for DC circuit.
 *2 Electrical Appliance and Material Safety Law of Japan

Molded Case Circuit Breakers
G-TWIN series
 Type number/Line protection

● **AAG series, 3-pole IEC/EN/GB/JIS conformed**

Breaker ampere frame	Rated current (A)	Type	<input type="checkbox"/> Available mounting and connection*
32	3	BW32AAG-3P003 <input type="checkbox"/>	Blank, X, E, Y, P
	5	BW32AAG-3P005 <input type="checkbox"/>	
	10	BW32AAG-3P010 <input type="checkbox"/>	
	15	BW32AAG-3P015 <input type="checkbox"/>	
	20	BW32AAG-3P020 <input type="checkbox"/>	
	30	BW32AAG-3P030 <input type="checkbox"/>	
50	5	BW50AAG-3P005 <input type="checkbox"/>	Blank, X, E, Y, P
	10	BW50AAG-3P010 <input type="checkbox"/>	
	15	BW50AAG-3P015 <input type="checkbox"/>	
	20	BW50AAG-3P020 <input type="checkbox"/>	
	30	BW50AAG-3P030 <input type="checkbox"/>	
	32	BW50AAG-3P032 <input type="checkbox"/>	
100	60	BW100AAG-3P060 <input type="checkbox"/>	Blank, X, E, Y, P
	63	BW100AAG-3P063 <input type="checkbox"/>	
	75	BW100AAG-3P075 <input type="checkbox"/>	
	100	BW100AAG-3P100 <input type="checkbox"/>	

● **EAG series, 3-pole IEC/EN/GB/JIS conformed**

Breaker ampere frame	Rated current (A)	Type	<input type="checkbox"/> Available mounting and connection*
50	5	BW50EAG-3P005 <input type="checkbox"/>	Blank, X, E, Y, P
	10	BW50EAG-3P010 <input type="checkbox"/>	
	15	BW50EAG-3P015 <input type="checkbox"/>	
	20	BW50EAG-3P020 <input type="checkbox"/>	
	30	BW50EAG-3P030 <input type="checkbox"/>	
	32	BW50EAG-3P032 <input type="checkbox"/>	
	40	BW50EAG-3P040 <input type="checkbox"/>	
	50	BW50EAG-3P050 <input type="checkbox"/>	
	63	60	
63		BW63EAG-3P063 <input type="checkbox"/>	
100	50	BW100EAG-3P050 <input type="checkbox"/>	Blank, X, E, Y, P
	60	BW100EAG-3P060 <input type="checkbox"/>	
	63	BW100EAG-3P063 <input type="checkbox"/>	
	75	BW100EAG-3P075 <input type="checkbox"/>	
	100	BW100EAG-3P100 <input type="checkbox"/>	
160	125	BW160EAG-3P125 <input type="checkbox"/>	Blank, X, E, P
	150	BW160EAG-3P150 <input type="checkbox"/>	
	160	BW160EAG-3P160 <input type="checkbox"/>	
250	175	BW250EAG-3P175 <input type="checkbox"/>	Blank, X, E, P
	200	BW250EAG-3P200 <input type="checkbox"/>	
	225	BW250EAG-3P225 <input type="checkbox"/>	
	250	BW250EAG-3P250 <input type="checkbox"/>	
400	250	BW400EAG-3P250 <input type="checkbox"/>	Blank, X, E, P
	300	BW400EAG-3P300 <input type="checkbox"/>	
	350	BW400EAG-3P350 <input type="checkbox"/>	
	400	BW400EAG-3P400 <input type="checkbox"/>	
630	500	BW630EAG-3P500 <input type="checkbox"/>	Blank, X, E, P
	600	BW630EAG-3P600 <input type="checkbox"/>	
	630	BW630EAG-3P630 <input type="checkbox"/>	
800	700	BW800EAG-3P700 <input type="checkbox"/>	Blank, X, E, P
	800	BW800EAG-3P800 <input type="checkbox"/>	

● **JAG series, 3-pole IEC/EN/GB/JIS conformed**

Breaker ampere frame	Rated current (A)	Type	<input type="checkbox"/> Available mounting and connection*
125	15	BW125JAG-3P015 <input type="checkbox"/>	Blank, X, E, P
	20	BW125JAG-3P020 <input type="checkbox"/>	
	30	BW125JAG-3P030 <input type="checkbox"/>	
	40	BW125JAG-3P040 <input type="checkbox"/>	
	50	BW125JAG-3P050 <input type="checkbox"/>	
	60	BW125JAG-3P060 <input type="checkbox"/>	
	75	BW125JAG-3P075 <input type="checkbox"/>	
	100	BW125JAG-3P100 <input type="checkbox"/>	
	125	BW125JAG-3P125 <input type="checkbox"/>	
160	125	BW160JAG-3P125 <input type="checkbox"/>	Blank, X, E, P
	150	BW160JAG-3P150 <input type="checkbox"/>	
	160	BW160JAG-3P160 <input type="checkbox"/>	
250	175	BW250JAG-3P175 <input type="checkbox"/>	Blank, X, E, P
	200	BW250JAG-3P200 <input type="checkbox"/>	
	225	BW250JAG-3P225 <input type="checkbox"/>	
	250	BW250JAG-3P250 <input type="checkbox"/>	

* See page 06/29.