



DS 500

Intelligent chart recorder for compressed air and gases

Measurement - control - indication - alarm - recording - evaluation



Advantages at a glance:

- **Clear layout:** 7" colour screen with touch panel...
- **Versatile:** Up to 12 optional sensors can be connected...
- **Suitable for industrial applications:** Metal housing IP 65 or panel mounting
- **Data available though world wide web:** Network-compatible and remote transmission via webserver
- **Intelligent:** Daily/weekly/monthly reports...
- **Mathematical function** for internal calculations
- **Totalizer function** for analogue signals
- **... Saves time and costs during installation**

DS 500 - the intelligent chart recorder of the next generation

From recording of the measured data, indication on a big colour screen, alerting, storage up to remote read-out via webserver... this is all possible with DS 500. By means of the CS Soft Basic software alarms can be sent via SMS or e-mail.

All measured values, measured curves and threshold exceedings are indicated. The curve progressions from the beginning of the measurement can be viewed by an easy slide of the finger.

Daily/weekly/monthly reports with costs in € and counter reading in m³ for each consumption sensor are completing the

sophisticated system concept. The big difference to ordinary paperless chart recorders reveals in the easy initiation and in the evaluation of the measured data. All sensors are identified directly and powered by DS 500. Everything is matched and tuned.

Mathematical function for internal calculations, e.g. the typical figures of a compressed air plant:

- costs in € per generated m³ air
- kWh/m³ generated air
- consumption of single lines including summation

Totalizer function for analogue signals (e.g. 0/4...20 mA, 0...10 V). In case of third-party sensors which e.g. only give a 4...20 mA signal for the actual flow in m³/h a total counter reading in m³ can be generated by means of the totalizer function.

No time consuming studying of the instruction manual... **this saves time.** Internal voltage supply of all sensors, no wiring of external mains units ... **this saves additional costs.**




All important information at a glance

Measured values, statistics, curves with the 7" colour screen touch panel

| A1 Compressed Air | | A2 Compressed Air | | A3 Compressed Air | | A4 Compressed Air | |
|-------------------|-------------------------|-------------------|---------------------------|-------------------|-------------------------|-------------------|-------------------------|
| A1a | 237.7 m ³ /h | A2a | 729.702 m ³ /h | A3a | 537.0 m ³ /h | A4a | 254.7 m ³ /h |
| -- | 34106 m ³ | -- | 13423271 m ³ | -- | 155132 m ³ | -- | 55234063 m ³ |
| B1 Nitrogen | | B2 Nitrogen | | B3 Nitrogen | | B4 Nitrogen | |
| B1a | 337.7 ltr/min | B2a | 657.7 ltr/min | B3a | 15.7 ltr/min | B4a | 237.7 ltr/min |
| -- | 27734 ltr | -- | 240041 ltr | -- | 34131 ltr | -- | 235322 ltr |
| C1 Oxygen | | C2 Oxygen | | C3 Oxygen | | C4 Oxygen | |
| C1a | 17.7 ltr/min | C2a | 37.7 ltr/min | C3a | 223.7 ltr/min | C4a | 75.8 ltr/min |
| -- | 4080 ltr | -- | 234108 ltr | -- | 3749 ltr | -- | 43584 ltr |

Real time measured values

All measured values can be seen at a glance. Threshold exceeding are indicated in red colour. A „measuring site name“ can be allocated to each sensor.

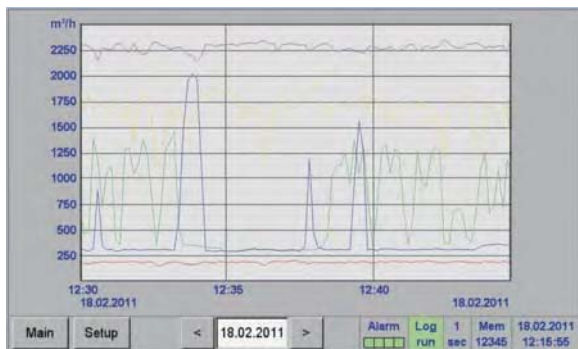

Graphic display

This display replaces the former evaluation of ordinary paper chart recorders and offers lots of advantages. The time axis can be moved by a finger slide. The „zoom function by finger movement“ which enables an analysis of peak values is unique.



Real time measured values and graph

Additionally to the measurement curves the real time value is indicated as well.

| Consumption report | | | | | | |
|--------------------|--------------------------------------|---------|-----------------------------|-----------------------------|---------------------------|---------|
| Month/Year | Consumption per month m ³ | Costs € | max value m ³ /h | min value m ³ /h | average m ³ /h | Total € |
| 2010 May | 7257 | 109 | 3.7 | 35.8 | 16.8 | 308 |
| 2010 June | 9530 | 143 | 3.8 | 36.1 | 18.9 | 402 |
| 2010 July | 7325 | 110 | 3.9 | 37.2 | 14.5 | 327 |
| 2010 August | 8099 | 121 | 3.9 | 37.1 | 16.1 | 353 |
| 2010 September | 7842 | 118 | 3.9 | 36.8 | 15.6 | 367 |
| 2010 October | 6167 | 93 | 3.9 | 37.3 | 12.2 | 291 |
| 2010 November | 9030 | 135 | 3.9 | 37.5 | 17.9 | 311 |
| 2010 December | 9062 | 136 | 3.9 | 37.5 | 18.0 | 388 |
| 2010 Total | 97953 | 1469 | 3.8 | 37.1 | 16.3 | 4164 |
| 2011 January | 8880 | 133 | 3.5 | 37.7 | 17.6 | 412 |

Statistics and reports

Different to ordinary chart recorders the DS 500 offers not only the recording of the measured data but also the evaluation of all flow sensors optionally as daily/ weekly/monthly report at the push of a button. It is no longer necessary to read-out the counter and transfer the values manually into a list. The reports can be imported to every PC into Excel® by means of a USB stick and after that they can be printed out without any additional software. This saves time and money and simplifies the evaluation enormously.



DS 500

Intelligent chart recorder for compressed air and gases



Versatile:

Up to 12 sensors, incl. all CS sensors (consumption, dew point, pressure, current, KTY, PT 100, PT 1000) are identified automatically by DS 500. Optional analogue sensors (0/4...20mA, 0...1/10/30 V, pulse) can be configured easily and quickly. Digital sensors can be connected via RS 485, Modbus RTU and SDI.

Digital sensors can be connected via RS 485, Modbus RTU and SDI.

Flexible:

Network-compatible and worldwide remote data transmission via Ethernet, integrated webserver.

Alarm relay/ fault indication:

Up to 32 threshold values can be configured freely and allocated to 4 different alarm relays. Collective alarms are possible.

Flow sensor
VA 500




Pressure sensor



Dew point sensor
FA 510



Flow meter
VA 520

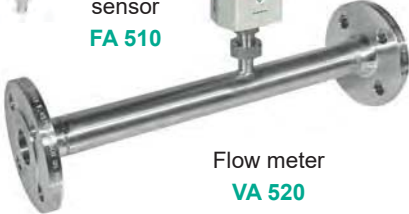

Clamp-on ammeter



current/effective power meters



Temperature probe Pt 100



Screw-in temperature probe Pt 1000



Third party sensors
0/4...20 mA

Third party sensors
pulse

Third party sensors
0-1/10 V

Third party sensors
RS 485
Modbus RTU

All sensor inputs are freely allocatable, incl. internal voltage supply.





Flow sensors

for compressed air and gases

- Installation and removal under pressure via standard 1/2" ball valve
- A safety ring avoids the uncontrolled ejection in case of installation/removal under pressure
- Usable for different gases: compressed air, nitrogen, argon, CO₂, oxygen



Dew point sensors

- Extremely long-term stable
- Quick adaption time
- Large measuring range (-80° to +20° Ctd)
- For all driers: Desiccant driers, membrane driers, refrigeration driers
- Easy installation under pressure via the standard measuring chamber with quick coupling



Pressure sensors

- Large selection of pressure sensors with different measuring ranges for each measuring purpose
- Quick installation under pressure by quick coupling
- Pressure sensors 0-10/16/40/100/250/400/600 bar overpressure
- Pressure sensors -1 - +15 bar (under-/overpressure)
- Differential pressure 1.5 mbar up to 4.2 bar
- Absolute pressure 0-1.6 bar (abs:)



- Large selection of temperature sensors e.g. for measurement of the ambient temperature or gas temperature
- Pt100 (2-wire or 3-wire)
- Pt1000 (2-wire or 3-wire)
- KTY sensors
- Temperature sensors with measuring transducer (4-20 mA output)



Temperature sensors



- For direct measurement of the heat volume (in kWh)
- Customary heat meters e.g. at heating systems, heat exchangers, district heating networks and so on can be connected to DS 500 either via pulse signals or 4-20 mA



Heat meters-/ water and gas meters



- CS PM 210 current/effective power meters for panel mounting with external current transformer for big machines and plants
- External current transformers for clamping around the phases (max. 2000 A)
- Measures kW, kWh, cos phi, kVar, kVA
- Data transfer DS 500 via Modbus



Current/effective power meters

By means of the intelligent chart recorder **DS 500**, all measuring data of a compressor station can be recorded, indicated and evaluated.

At **12 freely assignable sensor inputs** all our sensors can be connected as well as any optional third-party sensors and meters **with the following signal outputs:**

4-20 mA, 0-20 mA I 0-1 V / 0-10 V / 0-30 V I Pt 100 (2- or 3-wire), Pt 1000 (2- or 3-wire), KTY I pulse outputs (e.g. of gas meters) frequency output I Modbus protocol.



Chart recorder








Technical data DS 500

| | |
|----------------------------------|--|
| Dimensions of housing: | 280 x 170 x 90 mm, IP 65 |
| Connections: | 18 x PG 12 for sensors and supply, alarm relays 1 x RJ 45 Ethernet connection |
| Version panel mounting: | Cutout panel 250 x 156 mm |
| Weight: | 7.3 Kg |
| Material: | Die cast metal, front screen polyester |
| Sensor inputs: | <ul style="list-style-type: none"> • 4/8/12 sensor inputs for analogue and digital sensors freely allocatable. See options • Digital CS sensors for dew point and consumption with SDI interface FA/VA series, digital third-party sensors RS 485 / Modbus RTU, other bus systems realizable on request. • Analogue CS Sensors for pressure, temperature, clamp-on ammeters pre-configured. • Analogue third-party sensors 0/4...20 mA, 0...1/10/30V, pulse, Pt 100 / Pt 1000, KTY |
| Power supply for sensors: | 24 VDC, max. 130 mA per sensor, integrated mains unit max. 24 VDC, 25 W. In case of version 8/12 sensor inputs, 2 integrated mains units each max. 24 VDC, 25 W. |
| Interfaces: | USB stick, USB cable, Ethernet / RS 485 Modbus RTU / TCP, SDI other bus systems on request, WEB server optionally |
| Outputs: | <ul style="list-style-type: none"> • 4 relays (changeover contact 230 VAC, 6 A), alarm management, relays freely programmable, collective alarm • Analogue output, pulse in case of sensors with own signal output looped, like e.g. VA/FA series |
| Memory card: | Memory size 4 GB SD memory card standard |
| Power supply: | 100...240 VAC / 50-60 Hz, special version 24 VDC |
| Colour screen: | 7" touch panel TFT transmissive, graphics, curves, statistics |
| Accuracy: | see sensor specifications |
| Operating temperature: | 0...50°C |
| Storage temperature: | -20...70°C |
| Optionally: | Webserver |
| Optionally: | Quick measurement with 10 ms sampling rate for analogue sensors, Max/Min indication per second |
| Optionally: | Option „energy and flow report“ statistics, daily/weekly/monthly report |

| Description | Order No. | Input signals |
|---|-----------|--|
| DS 500 - intelligent chart recorder in basic version (4 sensor inputs) | 0500 5000 | Current signal (0...20mA/ 4...20mA) internal or external power supply Measuring range 0...20 mA Resolution 0.0001 mA Accuracy $\pm 0.03 \text{ mA} \pm 0.05 \%$ Input resistance 50 Ω |
| Option 4 additional sensor inputs for DS 500 | Z500 5001 | |
| Option 8 additional sensor inputs for DS 500 | Z500 5002 | Voltage signal (0...1 V) Measuring range 0...1 V Resolution 0.05 mV Accuracy $\pm 0.2 \text{ mV} \pm 0.05 \%$ Input resistance 100 k Ω |
| Option Integrated webserver | Z500 5003 | |
| Option „energy and flow report“ statistics, daily/weekly/monthly report | Z500 5004 | Voltage signal (0...10 V / 30 V) Measuring range 0...10 V Resolution 0.5 mV Accuracy $\pm 2 \text{ mV} \pm 0.05 \%$ Input resistance 1 M Ω |
| Option version for panel mounting | Z500 5006 | |
| Option power supply 24 VDC (instead of 100...240 VAC) | Z500 5007 | RTD Pt 100 Measuring range -200...850°C Resolution 0.1°C Accuracy $\pm 0.2^\circ\text{C}$ (-100...400°C) $\pm 0.3^\circ\text{C}$ (further range) |
| Option „mathematics calculation function“ for 4 freely selectable „virtual“ channels, (mathematical functions: addition, subtraction, division, multiplication) | Z500 5008 | |
| Option „Totalizer function for analogue signals“ | Z500 5009 | RTD Pt 1000 Measuring range -200...850°C Resolution 0.1°C Accuracy $\pm 0.2^\circ\text{C}$ (-100...400°C) |
| External Gateway Profibus | Z500 3008 | |
| CS Soft Basic - data evaluation in graphic and table form, reading out of the measured data via USB or Ethernet | 0554 7040 | Pulse Measuring range min pulse length 100 μs frequency 0...1 kHz max. 30 VDC |
| CS Soft Network - Database Client/Server Solution (up to 5 DS 500) - database (MySQL) to Server - data evaluation via Client-Software | 0554 7041 | |
| CS Soft Network - Database Client/Server Solution (up to 10 DS 500) - database (MySQL) to Server - data evaluation via Client-Software | 0554 7042 | |
| CS Soft Network - Database Client/Server Solution (up to 20 DS 500) - database (MySQL) to Server - data evaluation via Client-Software | 0554 7043 | |
| CS Soft Network - Database Client/Server Solution (> 20 DS 500) - database (MySQL) to Server - data evaluation via Client-Software | 0554 7044 | |



Suitable probes from the product range:

| Flow sensors VA 500: | Order No. | |
|---|------------------------------|---|
| VA 500 flow sensor in basic version: Standard (92.7 m/s), sensor length 220 mm, without display | 0695 5001 |  |
| Options for VA 500: (see page 81) | | |
| Flow meters VA 520: | | |
| Flow meter VA 520 with integrated measuring section, (R 1/4" DN 8) | 0695 0520 |  |
| Flow meter VA 520 with integrated measuring section, (R 1/2" DN 15) | 0695 0521 | |
| Flow meter VA 520 with integrated measuring section, (R 3/4" DN 20) | 0695 0522 | |
| Flow meter VA 520 with integrated measuring section, (R 1" DN 25) | 0695 0523 | |
| Flow meter VA 520 with integrated measuring section, (R 1 1/4" DN 32) | 0695 0526 | |
| Flow meter VA 520 with integrated measuring section, (R 1 1/2" DN 40) | 0695 0524 | |
| Flow meter VA 520 with integrated measuring section, (R 2" DN 50) | 0695 0525 | |
| | | |
| Dew point sensors: | | |
| FA 510 dew point sensor, -80...+20 °Ctd incl.inspection certificate | 0699 0510 |  |
| FA 510 dew point sensor, -20...+50°Ctd, incl.inspection certificate | 0699 0512 | |
| Standard measuring chamber for compressed air up to 16 bar | 0699 3390 | |
| | | |
| Connection cables for flow sensors / dew point sensors: | | |
| Connection cable 5 m | 0553 0104 | |
| Connection cable 10 m | 0553 0105 | |
| | | |
| Pressure sensors: | ± 1 % accuracy of full scale | ± 0,5 % accuracy of full scale |
| Standard pressure sensor CS 16 from 0...16 bar | 0694 1886 | 0694 3555 |
| Standard pressure sensor CS 40 from 0...40 bar | 0694 0356 | 0694 3930 |
| Standard pressure sensor CS 1.6 from 0...1.6 bar abs. | | 0694 3550 |
| Standard pressure sensor CS 10 from 0...10 bar | 0694 3556 | 0694 3554 |
| Standard pressure sensor CS 100 from 0...100 bar | | 0694 3557 |
| Standard pressure sensor CS 250 from 0...250 bar | | 0694 3558 |
| Standard pressure sensor CS 400 from 0...400 bar | | 0694 3559 |
| Precision pressure sensor CS -1...+15 bar, ± 0.5 % accuracy of full scale | | 0694 3553 |
| Precision differential pressure sensor CS 400, 0...400 mbar differential pressure, 0.075% accuracy of full scale, static pressure max. 40 bar | 0694 3560 | |
| | |  |
| Temperature sensors: | | |
| Screw-in temperature probe PT 100 class A, length: 300 mm, d=6mm, with integrated transducer 4...20 mA = -50°C...+500°C (2-wire) | 0604 0201 |  |
| Outdoor temperature probe, PT 100 class B (2-wire) in wall housing (82x55x33 mm), temperature range: -50°C to +80°C | 0604 0203 | |
| Indoor temperature probe, PT 100 class B (2-wire) in wall housing (82x55x33 mm), temperature range: -50°C to +80°C | 0604 0204 | |
| Temperature probe PT 100 class A (4-wire) with cable, length: 300 mm, d=6 mm, -70°C to +260°C, 5 m connection cable (PFA) with open ends | 0604 0205 | |
| Temperature probe PT 100 class A (4-wire) with cable, length: 100 mm, d=6 -70°C to +260°C, 5 m connection cable (PFA) with open ends | 0604 0206 | |
| Temperature probe PT 100 class A (4-wire) with cable, length: 200 mm, d=6 -70°C to +260°C, 5 m connection cable (PFA) with open ends | 0604 0207 | |
| Surface temperature probe, magnetic, magnet dimensions 39x26x25 mm, PT 100 class B (2-wire), -30 to +180°C, 5 m connection cable (PFA) with open ends | 0604 0208 | |
| Clamp screwing 6mm; G 1/2" PTFE clamp ring pressure tight up 10 bar material: stainless steel, temperature range: max. +260°C | 0554 0200 | |
| Clamp screwing 6mm; G 1/2" stainless steel clamp ring pressure tight up to 16 bar, material: stainless steel, temperature range: max. +260°C | 0554 0201 | |
| | | |
| | |  |
| Connection cables for pressure sensors / temperature sensors: | | |
| Connection cable 5 m | 0553 0108 | |
| Connection cable 10 m | 0553 0109 | |
| | | |
| Clamp-on ammeters: | | |
| Clamp-on ammeter 0...1000 A TRMS incl. 5 m connection cable with open ends | 0554 0518 |  |
| Clamp-on ammeter 0...400 A TRMS incl. 3 m connection cable with open ends | 0554 0510 | |




CS PM 210

Current/effective power meter for panel mounting

Measures voltage, current and calculates:

Active power [kW]
 Apparent power [kVA]
 Reactive power [kVar]
 Active energy [kWh]
 cos phi

All measured data are transferred digitally (Modbus) to DS 500 and can be recorded there.

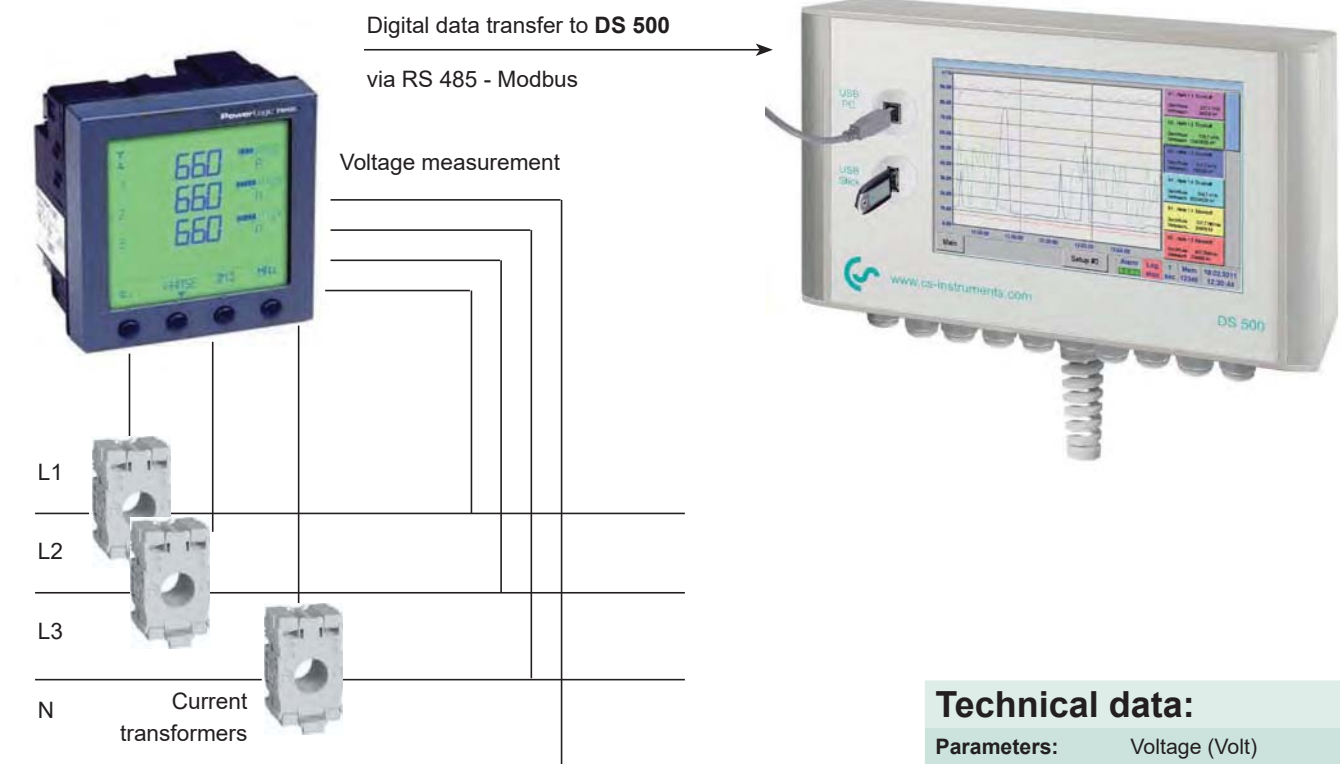

| Description | Order No. |
|--|-----------|
| CS PM 210 current/effective power meter for panel mounting, current transformer from 100 A to 2000 A connectable | 0554 5353 |
| Current transformer 100/5 A connectable to current/effective power meter for panel mounting (for cables up to Ø 21 mm) | 0554 5344 |
| Current transformer 200/5 A connectable to current/effective power meter for panel mounting (for cables up to Ø 21 mm) | 0554 5345 |
| Current transformer 300/5 A connectable to current/effective power meter for panel mounting (for cables up to Ø 22 mm) | 0554 5346 |
| Current transformer 500/5 A connectable to current/effective power meter for panel mounting (for cables up to Ø 22 mm) | 0554 5347 |
| Current transformer 600/5 A connectable to current/effective power meter for panel mounting (for cables up to Ø 22 mm) | 0554 5348 |
| Current transformer 1000/5 A connectable to current/effective power meter for panel mounting (for current bar up to 65 x 32 mm) | 0554 5349 |
| Current transformer 2000/5 A connectable to current/effective power meter for panel mounting (for current bar up to 127 x 38 mm) | 0554 5350 |
| Connection cable to DS 500, 5 m, with open ends | 0553 0108 |
| Connection cable to DS 500, 10 m, with open ends | 0553 0109 |


Technical data:

| | |
|--------------------------------------|---|
| Parameters: | Voltage (Volt) Current (Ampere) Cos phi Active power (kW) Apparent power (kVA) Reactive power (kVar) Active energy (kWh) Supply frequency (Hz) All parameters are transferred digitally to DS 500 |
| Accuracy current measurement: | ± 0,5% of 1 to 6 A |
| Accuracy voltage: | ± 0,5% of 50 V to 277 V |
| Accuracy active energy: | IEC 62053-21 Class 1 |
| Interfaces: | RS 485 (Modbus protocol) |
| Measuring range: | Voltage measurement max. 480 Volt |
| Dimensions: | 96 x 96 x 69 mm (W x H x D) |
| Operating temperature: | -5...+55°C |




Software

CS Soft Basic - evaluation of measured data for single computers

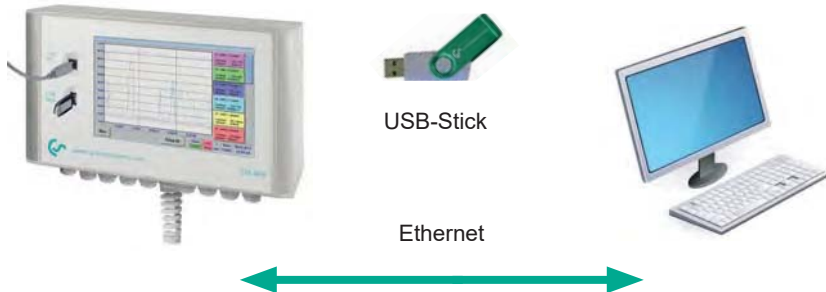

The measured data stored in the data logger integrated in DS 500 can be read-out via USB stick.

If DS 500 has the optional Ethernet interface the measured data can also be read-out over big distances via the computer network

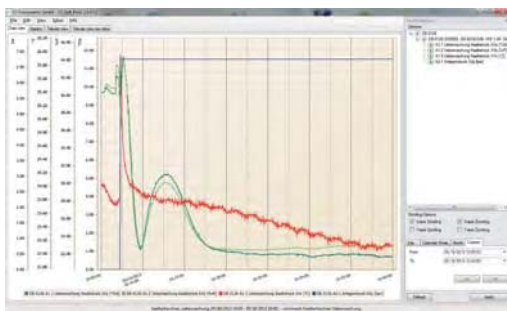

- • **Graphic evaluation**

All measurement curves are indicated in different colours. All necessary functions like free zoom, selection/deselection of single measured curves, free selection of time periods, scaling of the axis, selection of colours and so on are integrated: This view can be stored as a pdf file and sent by e-mail. Different data can be merged in one million file.

- • **Table view**

All measured points are listed with the exact time interval. The desired measuring channels with the measuring site name can be selected via the diagram explorer.

Statistics

All necessary statistics data are apparant at a glance. So the user can quickly see which minimum or maximum measured values occurred at which time and for how long.



- • **Energy and flow evaluation**

The software carries out on energy and flow analysis for all connected flow sensors optionally as daily, weekly or monthly report.

Connection to Bus system



RS 485 network (Modbus RTU)
or Ethernet (Modbus/TCP)

With the „Ethernet / RS 485 - interface“ DS 500 can be connected to customer-owned Bus system (e.g. PLC, building management system BMS, central control system, SCADA,...).

The measured values of all sensors can be retrieved via Modbus protocol. A detailed protocol description is enclosed with each DS 500 instrument. When using the Ethernet interface the IP address at DS 500 can be freely adjusted. As an alternative DS 500 waits for the address allocation by a DHCP server.




Chart recorder

CS Soft Network - evaluation of the measured data for several computers in the network

By means of the CS Soft Network an optional number of DS 500/ DS 400 instruments can be evaluated via Ethernet. The software stores the measured data of all DS 500 / DS 400 cyclically (cycle freely selectable) in a SQL database on the server.

In case of an exceeding of the stored alarm values the software automatically sends an SMS or an e-mail. Furthermore, different user levels can be defined in the server software so that single staff members only can access the measured data

of certain DS 500 / DS 400. The evaluation of the measured data can be carried out by means of the client software from each PC within the company.

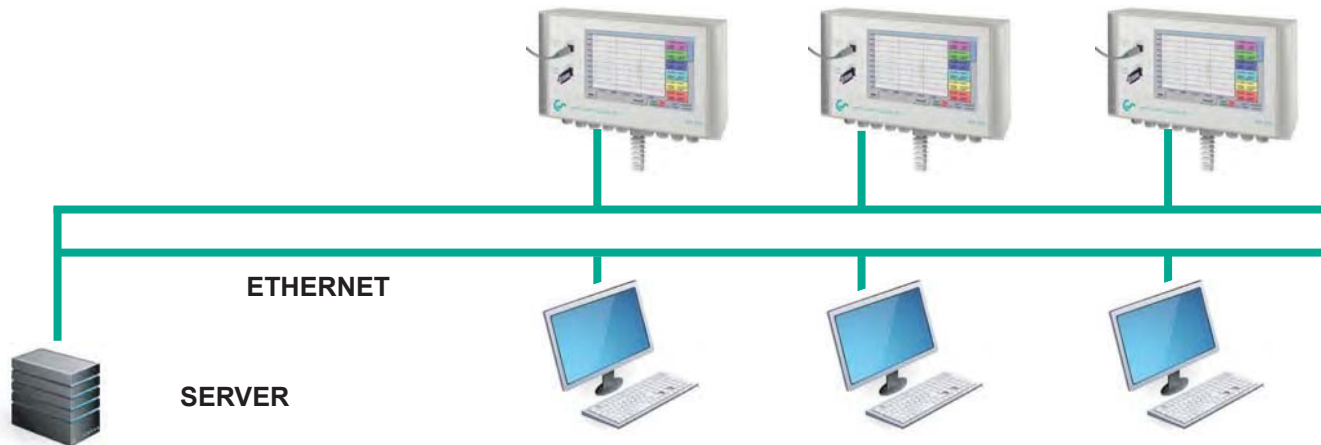

Funktionen der CS Soft Network (Server): Functions of the CS Soft Network (Server):


- Automatic data storage in My SQL database (cycle freely programmable)
- User administration
- Configuration alarm message, transmission via SMS/e-mail
- Configuration backup generation

Functions of the CS Soft Network (Client):

- Indication of current measured values
- Graphical chart with zoom function
- In table form
- Report generation (standard report with Min-Max values, number of alarm exceedings, moment of alarm exceeding)
- Automatic consumption report



WORLD WIDE WEB

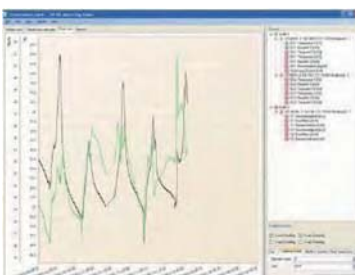

Graphical chart with zoom function

- Selection of the measuring channels to be indicated
- Easy zoom in and zoom out
- Up to 8 y-axis
- Quick access to day, week, month view



View: Current measurement values

- Load background image
- Place/fix window with measurement values
- Red measurement values in case of alarm exceeding

| Channel | Unit | Description | Jan | Feb | Mar | Apr | Mai | Jun | Jul | Aug | Sep | Okt | Nov | Dez | Total |
|------------------------|-------------------|-------------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| CS-COMP (DS500) | | | | | | | | | | | | | | | |
| A3 VA 420 SDI | m ³ | start count | 9.560 | 18.440 | 26.550 | 34.502 | 43.201 | 50.458 | 59.988 | 67.313 | 75.412 | 83.254 | 89.421 | 96.451 | |
| | m ³ | end count | 18.440 | 26.550 | 34.502 | 43.201 | 50.458 | 59.988 | 67.313 | 75.412 | 83.254 | 89.421 | 96.451 | 107.513 | |
| | m ³ | total | 8.880 | 8.110 | 7.952 | 8.699 | 7.257 | 9.530 | 7.325 | 8.099 | 7.842 | 6.167 | 9.030 | 9.062 | 97.953 |
| | m ³ /h | average | 17,8 | 16,1 | 15,8 | 17,3 | 15,8 | 18,9 | 14,5 | 16,1 | 15,8 | 12,2 | 17,9 | 18,0 | 16,2 |
| | m ³ /h | min | 3,5 | 3,5 | 3,7 | 3,7 | 3,7 | 3,8 | 3,9 | 3,9 | 3,9 | 3,9 | 3,9 | 3,9 | |
| | m ³ /h | max | 37,7 | 38,0 | 38,5 | 35,1 | 35,8 | 36,1 | 37,2 | 37,1 | 36,8 | 37,3 | 37,5 | 37,5 | |
| | Euro | costs | 133 | 122 | 119 | 130 | 109 | 143 | 110 | 121 | 118 | 93 | 135 | 136 | 1.469 € |
| | m ³ | start count | 24.750 | 57.002 | 87.541 | 113.245 | 113.245 | 138.451 | 167.865 | 195.354 | 219.874 | 248.798 | 279.477 | 312.313 | |
| | m ³ | end count | 57.002 | 87.541 | 113.245 | 113.245 | 138.451 | 167.865 | 195.354 | 219.874 | 248.798 | 279.477 | 312.313 | 345.554 | |

Consumption analysis (in connection with option "consumption report")



Webserver


The new webserver with extended features for the chart recorders DS 500 and DS 400 is available with immediate effect. Users can get direct access to their measuring values worldwide (current and historic measuring values) and display the measuring values on their smart phone, tablet or computer. For monitoring of threshold values users can receive an automated „alarm E-mail“.

The new webserver can be ordered as an option with each stationary DS 500/400, but also for their mobile counterparts. For using the features of the webserver, the DS 500/400 must be set up with it's own IP address within the network.


The webserver provides a website, which displays the measuring values. This website can be accessed from any web browser on each smart phone, tablet or computer via it's unique IP address. This is all possible without the installation of any new or additional software.



View of the real time measuring values (graphic and table view)

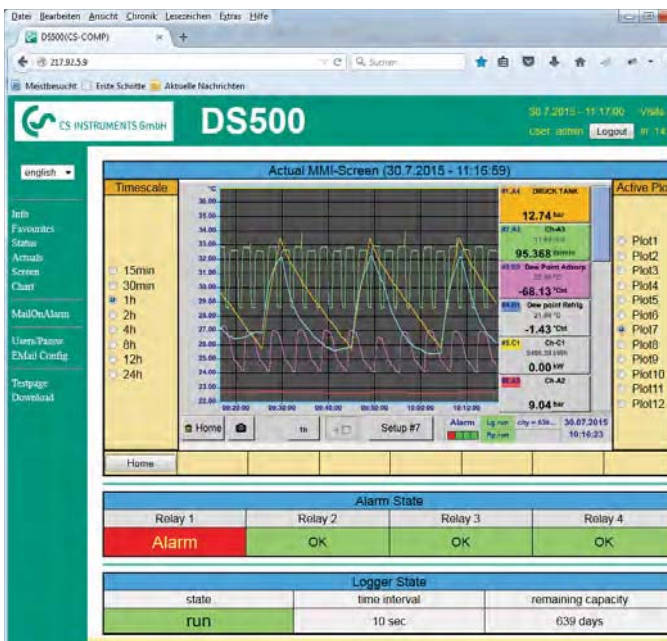

View of the historic measuring values as a single chart (time period freely selectable)

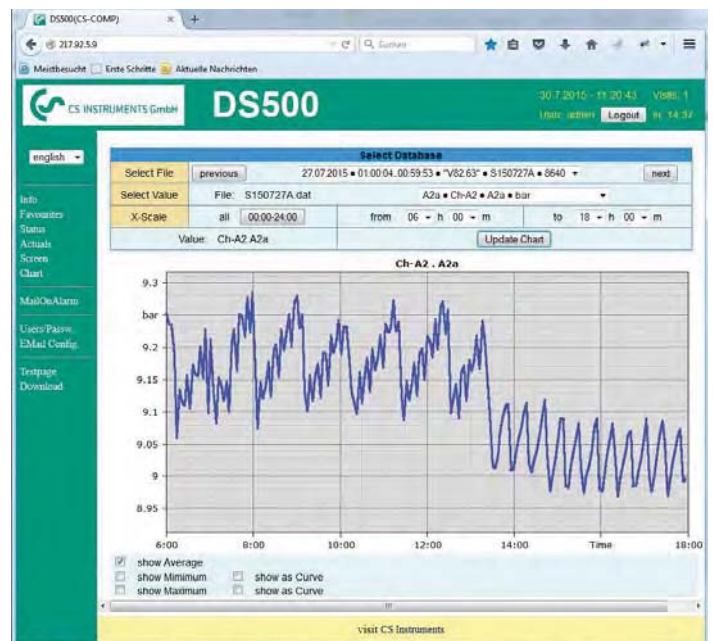

Automated „alarm e-mail“ for threshold value exceedance:

Access authorization

Different groups with different users/passwords can be assigned to different access levels.

Starting the data logger

In case of a stopped data logger the group operator or administrator can start the data logger remotely, via the web server.

PS: The new webserver can be retro fitted to any DS 500/ DS 400 already in use.