




PIN NO.		PIN NO.
1	← RED	A
2	← WHITE	B
3	← BLACK	C
4	← GREEN	D
		E } (NO CONNECTION)
		F }



A	NO. REQD			LIST OF MATERIAL					
	350C104			ITEM NO.	M K	PART NO.	DESCRIPTION	MATERIAL	REMARKS
			—1				CABLE ASSEMBLY		
			1	1		12B220—1	CONNECTOR PLUG		
			1	2		11A41—1	CABLE, 4 CONDUCTOR, 24AWG X 6.0 [152] LG		
			1	3			LABEL		SEE NOTE(1.)
			1	4		12331—109	HEAT SHRINKABLE TUBING X 1.3 [33] LG		CLEAR
			1	5		12B192—6	CONNECTOR, MALE, 6—PIN		
			4	6		92357—001	WIRE FERRULES NON—INSULATED		

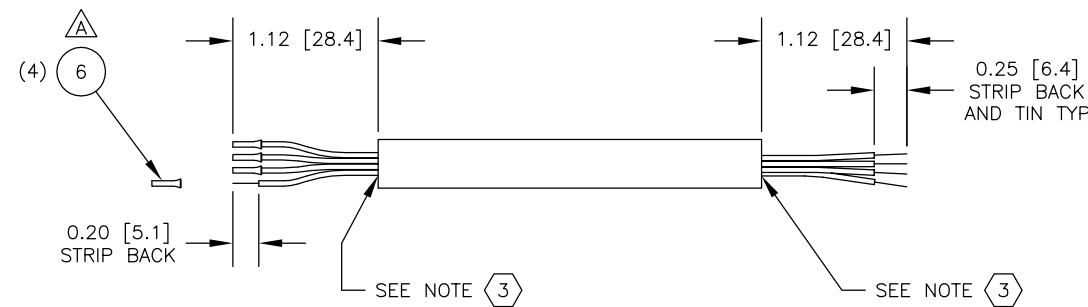

REAR VIEW

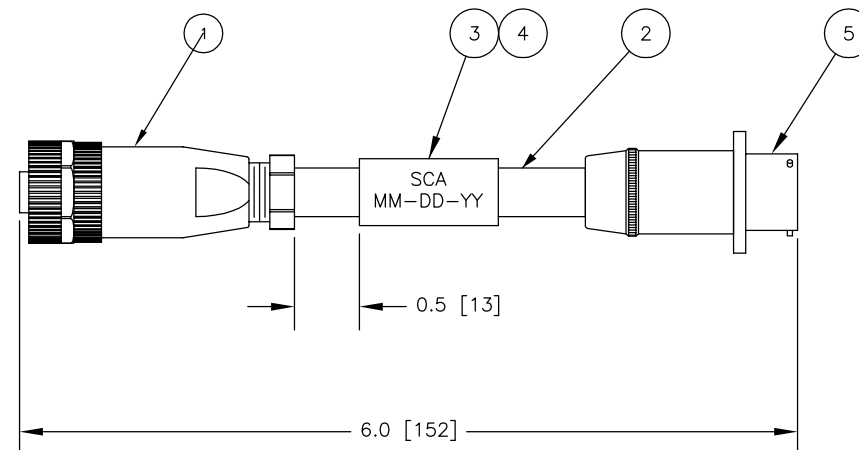

1. MARK LABEL (ITEM 3) WITH THE CABLE ASSEMBLY MODEL NUMBER AND DATE PRIOR TO COVERING WITH CLEAR HEAT SHRINKABLE TUBING (ITEM 4)
2. TEMPERATURE RANGE: -13°F TO 176°F [-25°C TO 80°C]
3. SHIELD TO BE CUT FLUSH WITH END OF CABLE COVER.
4. RATED IP-67.

		ADDED ITEM 6 TO BOM OMITTED 'TIN' ON LEFT END OF CABLE STRIP BACK WAS 1/4 [6.4] ON LEFT END OF ITEM 2 ECR #78122				JGR 05/08/12		JGH 05/08/12							
A		SYM				REVISION				BY DATE		APVD			
BY		DATE		<div><div>MAXCESS</div><div>222 WEST MEMORIAL ROAD OKLAHOMA CITY, OK 73114 TEL: 405.755.1600 FAX: 405.755.8425 WWW.MAXCESSINTL.COM</div><div>MAGPOWER  TIDLAND</div></div>											
DRAWN		LZ										05/12/11			
CHECKED		JMP										05/23/11			
APPROVED		JMP										05/23/11			
DRAWING REFERENCE				NUMBER				<div><div>THIRD ANGLE PROJECTION</div><div>DIMENSIONS ARE SHOWN IN INCHES [mm] UNLESS OTHERWISE NOTED</div></div>							
TOLERANCES: UNLESS OTHERWISE SPECIFIED				This drawing is the property of FIFE CORPORATION. It is loaned with the understanding that it may not be reproduced nor may the information contained herein be used for the making of drawings or for manufacturing purposes without the written consent of FIFE CORPORATION.											
INCHES .X = ±.1 .XX = ±.03 .XXX = ±.010 FRACTIONS = STOCK SIZE				GEOMETRICAL SYMBOLS PER ANSI Y14.5M UNLESS OTHERWISE SPECIFIED											
SURFACE FINISH EXPOSED 250 AA MACHINED 125 AA DE-BURR ALL EDGES 0.020 [0.5] MAX				STANDARD SHOP PRACTICES AND STANDARD SHOP RUN TOLERANCES PER DRAWING 40400											
LOCATION				SCALE		SIZE		DRAWING NO.				SHEET NO.		REV	
OK				NONE		C		350C104				1 OF 1		A	