

KS for GKS-100 293: inst. height  
16.0mm

**KS-100 47 93**

Item KS-1004793



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology



1:1

KS for GKS-100 293: inst. height  
16.0mm

**KS-100 47 93**

Item KS-1004793




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### General data

Product group	Receptacles (KS)
Series	KS-100
Sub-series	KS-100 press-in version
Type of receptacle connection	Wire-wrap
Press ring	No
Surface area	Gold
Collar diameter	1.8 mm [.070 in]
Collar height	0.2 mm [.007 in]
Wire-wrap post length	9.3 mm [.366 in]
Knurl	No
Vacuum-tight	yes (< 1 ccm / min)
RoHS-compliant	Yes

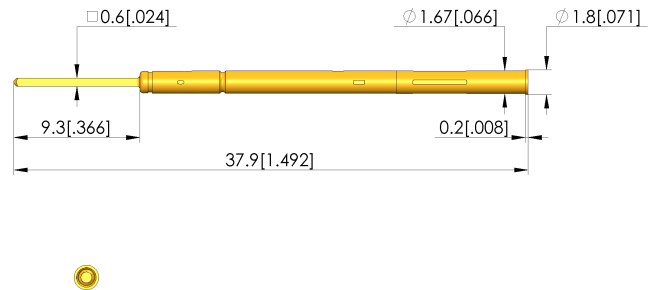

### Mounting hole

Mounting hole in CEM1	1.68 - 1.69 mm [.066 - .066 in]
Mounting hole in FR4	1.69 - 1.70 mm [.066 - .066 in]

### Mechanical data

Total length	37.9 mm [1.49 in]
Outer diameter	1.67 mm [.065 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/22 EN

Weitere Informationen zum Thema  
Test probes



RECEPTACLES