


TSCHAN® Elastomer Jaw Couplings

Type Nor-Mex® G

Multi-part design, to change the intermediate ring without axial movement of the driven parts

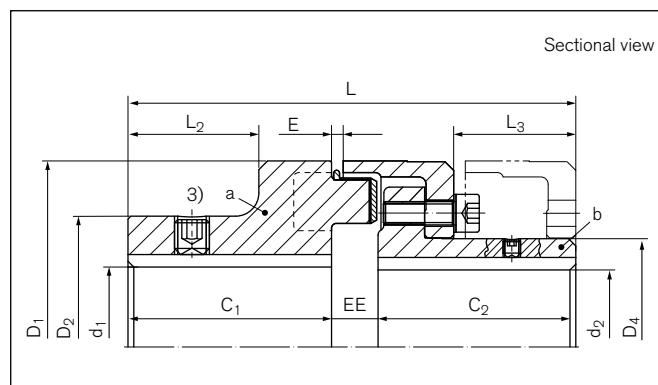

Dimensions / Technical data

- T_{KNPb72}** = Coupling nominal torque by using the elastic element Pb72
T_{KNPb82} = Coupling nominal torque by using the elastic element Pb82
n_{max} = Max. rotation speed
d_{1kmax} = Max. bore diameter d₁ with keyway acc. to DIN 6885-1
d_{2kmax} = Max. bore diameter d₂ with keyway acc. to DIN 6885-1

- D₁** = Outer diameter hub
D₂ = Outer diameter hub
D₄ = Outer diameter hub
C₁ = Guided length in hub bore
C₂ = Guided length in hub bore
L = Total length
L₂ = Length on the hub
L₃ = Length on the hub

- E** = Gap width between left and right component
F_E = Tolerance of the gap width E
EE = Distance of the hubs
F_{EE} = Tolerance of the hub distance
G_{wa} = Weight of subassembly a
G_{wub} = Weight, unbored

Identifier	Size	T _{KNPb72} ²⁾	T _{KNPb82} ²⁾	n _{max}	d _{1kmax}	d _{2kmax}	D ₁	D ₂	D ₄	C ₁
		Nm	Nm	1/min	mm	mm	mm	mm	mm	mm
WN0208	82	48	75	5000	32	32	82	53	44,5	40
WN0209	97	96	150	5000	42	39	97	69	54,5	50
WN0211	112	150	230	5000	48	46	112	79	64,5	60
WN0212	128	250	380	5000	55	53	128	90	74,5	70
WN0214	148	390	600	4500	65	65	148	107	92,5	80
WN0216	168	630	980	4000	75	75	168	124	104,5	90
WN0219	194	1050	1650	3500	85	85	194	140	121,5	100
WN0221	214	1500	2400	3000	95	95	214	157	135,5	110
WN0224	240	2400	3700	2750	110	100	240	179	146	120
WN0226	265	3700	5800	2500	120	115	265	198	164	140
WN0229	295	4900	7550	2250	130	130	295	214	181	150
WN0233	330	6400	9900	2000	150	135	330	248	208	160
WN0237	370	8900	14000	1750	170	160	370	278	241	180
WN0241	415	13200	20500	1500	190	180	415	315	275	200
WN0248	480	18000	28000	1400	210	200	480	315	289	220
WN0257	575	27000	41000	1200	230	280	575	350	368	240

To continue see next page

TSCHAN® Elastomer Jaw Couplings

Type Nor-Mex® G

Identifier	Size	C ₂	L	L ₂	L ₃	E	F _E	EE	F _{EE}	G _{wa} ¹⁾	G _{wub}
		mm	mm	mm	mm	mm				kg	kg
WN0208	82	40	92	24	20	3	+/- 1,0	12	+/- 1,0	0,9	2,0
WN0209	97	49	113	30	30,5	3	+/- 1,0	14	+/- 1,0	1,7	3,4
WN0211	112	58	133	38	32,5	3,5	+/- 1,0	15	+/- 1,0	2,6	5,5
WN0212	128	68	154	45	42	3,5	+/- 1,0	16	+/- 1,0	4,1	8,3
WN0214	148	78	176	52	47	3,5	+/- 1,0	18	+/- 1,0	6,3	13,1
WN0216	168	87	198	56	52,5	3,5	+/- 1,5	21	+/- 1,5	9,6	19,4
WN0219	194	97	221	62	60	3,5	+/- 1,5	24	+/- 1,5	13,8	28,6
WN0221	214	107	243	68	66,5	4	+/- 2,0	26	+/- 2,0	19,1	38,8
WN0224	240	117	267	75	75,5	4	+/- 2,0	30	+/- 2,0	26,7	52,4
WN0226	265	137	310	90	88	5,5	+/- 2,0	33	+/- 2,5	37,5	75,3
WN0229	295	147	334	98	96	8	+/- 2,5	37	+/- 2,5	47,9	97,3
WN0233	330	156	356	104	101,5	8	+/- 2,5	40	+/- 2,5	66,5	130,0
WN0237	370	176	399	118	117	8	+/- 2,5	43	+/- 2,5	93,9	183,6
WN0241	415	196	441	135	131	8	+/- 2,5	45	+/- 2,5	129,7	258,2
WN0248	480	220	485	150	149	8	+/- 2,5	45	+/- 2,5	164,4	346,5
WN0257	575	240	525	170	168	8	+/- 2,5	45	+/- 2,5	233,5	528,8

¹⁾ Weight inclusive the half share of the intermediate ring

²⁾ Attention on peak load - take into account maximum torque notified in the catalogue TSCHAN® Nor-Mex® - data overview page 11

³⁾ Set screw on demand

Ordering example: Nor-Mex® G

Identifier	Size	d _{1k}	d _{2k}	Buffer identifier (optional) ⁴⁾	Further details*
WN0224	240	90	70	Pb82	*

⁴⁾ Details on elastomer materials see page 6 and 11 in the catalogue TSCHAN® Nor-Mex®

^{*)} Without any other specification, we deliver as a standard: with set screws and keyway acc. to DIN 6885-1, keyway side fit P9, bore tolerance H7